Toilet Seat (Style A):

Seat Contents:

1. Seat Cover w/Integrated Hinge
2. Seat Bolts
3. Seat Finger Nuts
4. Hinge Covers.

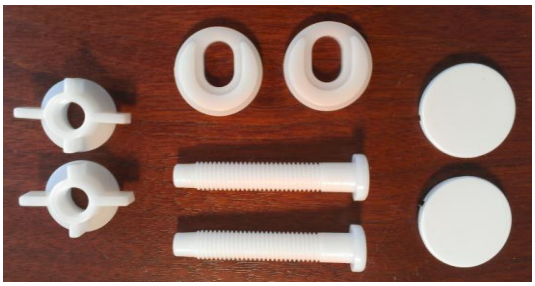

Suggested Installation Steps:

1. Roughly position the seat onto the closet's rim ensuring the slot within the hinge is positioned over the seat rim holes.

2. Insert the seat bolt through the hinge washer and rim hole.

3. Loosely tighten the seat finger nuts onto the seat bolt.

4. Lift the seat cover and position the seat into its final desired position

5. Secure the seat bolt to the rim by grasping the finger nut while tightening the bolt with a Philips head screw driver.

6. Once the seat is securely fastened to the closet, the hinge covers can be closed and secured.