


Toilet Seat (Style B):


Seat Contents:

1. Seat Cover w/Integrated Hinge
2. Seat Bolts
3. Seat Finger Nuts
4. Hinge Washers
5. Hinge Friction Pads

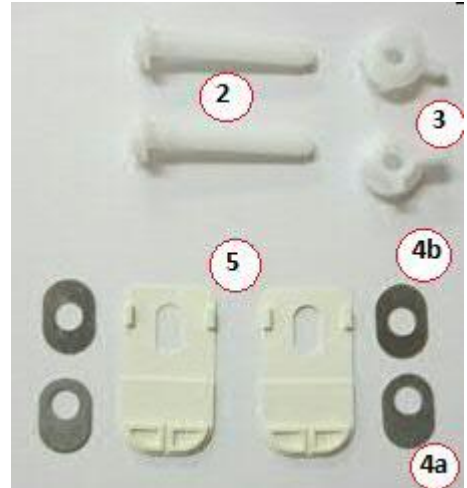

Suggested Installation Steps:

1. Insert the hinge friction pads (5) onto the base of the seat's hinge.

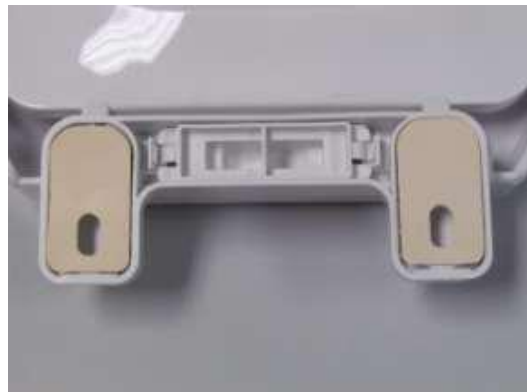

2. Roughly position the seat onto the closet's rim ensuring the slot within the hinge is positioned over the seat rim holes.

NOTE: The hinge covers will need to be detached.



3. Place the hinge washers (4a, or 4b) into the hinge slot.

NOTE:

- Insert the washer into the slot in an orientation that closely resembles the pattern that is developed between the hinge slot and rim hole.
- Dependent upon the rim contour and seat position, the rim hole within the hinge may be positioned anywhere within the hinge slot.

a. Should the rim hole be located towards the top of the hinge slot, orient the hinge washer (4a) in such a manner that the opening within the hinge washer (4a) closely fits above the rim hole.



b. Should the rim hole be located towards the bottom of the hinge slot, orient the hinge washer

(4a) in such a manner that the opening within the hinge washer (4a) closely fits above the rim hole.



c. Should the rim hole be located towards the centre of the hinge slot, orient the hinge washer (4b).



4. Insert the seat bolt (2) through the hinge washer (4a or 4b) and rim hole.



5. Loosely tighten the seat finger nuts (3) onto the seat bolt (2).



6. Lift the seat cover and position the seat into its final desired position.



7. Secure the seat bolt (2) to the rim by grasping the finger nut (3) while tightening the bolt with a Philips head screw driver.



8. Once the seat is securely fastened to the closet, the hinge covers can be closed and secured.

